


# KD-X222PO

4K HDMI over CAT5e/6 HDBaseT Extender Tx + Rx Kit. 10.2Gbps Bandwidth. IR Emitter and Sensor Included.

## SYSTEM DESIGN EXAMPLE

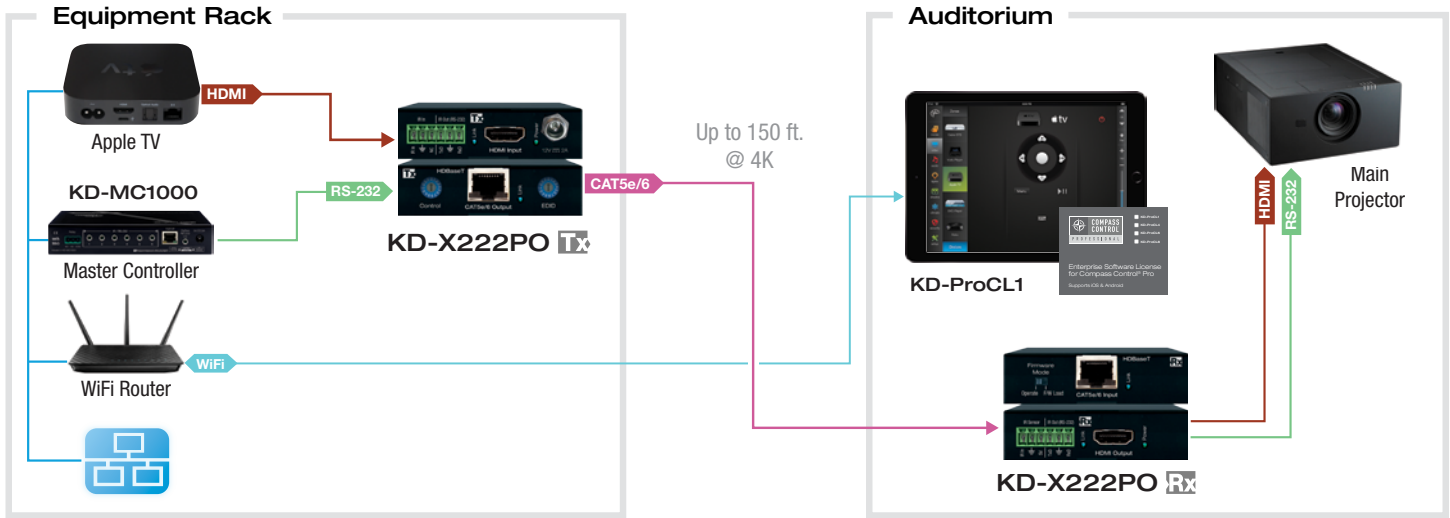

\* For all installations, we highly recommend use of CAT6 STP cabling, especially in hostile electrical environments. The shield of CAT6 STP must be soldered on both ends to the shield of RJ45 connector used. The CAT5/5e/6 cable has to be terminated according to TIA/EIA-568-B standard. The use of STP CAT5, 5e is not recommended.